



RESEARCH ARTICLE

CAM SHIFT TRACKING FOR SURVEILLANCE APPLICATIONS

*Rupali R. Sonawane

Dept of E&TC, Government College of Engg, Jalgaon, Maharashtra

ARTICLE INFO

Article History:

Received 23rd March, 2016
Received in revised form
20th April, 2016
Accepted 07th May, 2016
Published online 15th June, 2016

Key words:

Tracking,
Surveillance,
CAMshift

ABSTRACT

The aim of this system is to track person of interest in real time based on scenes obtained from camera modules. This system avoids potential human errors as we are using automatic monitoring. It is a histogram based real time tracking system. Moving objects are detected using background subtraction. Moving object detection, recognition and tracking are basic steps in processing video frames.

Copyright©2016, Rupali R. Sonawane. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Citation: Rupali R. Sonawane. 2016. "Cam shift tracking for surveillance applications", *International Journal of Current Research*, 8, (06), 32390-32392.

INTRODUCTION

Public security has become very important issue due to the increased terrorist attacks, burglaries etc. Electronic surveillance forms an integral part of today's security systems. CCTV modules are sold in huge numbers across the globe. Primitive surveillance systems (Raty, 2010), involved cameras. All these cameras would feed the live video to a dedicated monitor and in a control room many such monitors would be stacked one upon the other. These systems can be found in departmental stores, museum to high security areas like railway stations, airports and banks. The main objective of this project is to develop a system which reliably detects the person's presence or absence in a locality. The first part of the paper provides information about the algorithm selection and camera selection.

Literature Review

In (Wang, 2009) a method to track any object which is differ from the background was proposed. Multiple objects gets consistently tagged and hence it is a problem for selecting an object of interest. In (Sahani, 2011) a method of tracking an aerial objects was discussed. The given image is divided into blocks and these blocks are adaptively changing their size according to template size.

*Corresponding author: Rupali R. Sonawane

Dept of E&TC, Government College of Engg, Jalgaon, Maharashtra



Figure 1. Applications of camera surveillance systems

In (Jung, 2006 and Denman, 2009) authors has discussed motion segmentation computation and also optical flow. It creates a difficulty when object is detected at start. In (Chen, 2012) a real time tracking and adaptive framework was done. In (Cho, 2006) partial filtering was discussed. In (Li, 2009) author discussed mean shift algorithm which is suitable for multiple objects tracking. In (Cho, 2006) it showed that these algorithms are computationally complex. In (Bradski, 1998) CAMshift algorithm was discussed which simple and efficient algorithm for tracking. In (Qin-lan, 2009) location of the object could be tracked from probability distribution of an image. In

(Gang, 2010) the author proposed an algorithm which processes all the pixels in a given frame.

Video processing elements

• **Methods for noise reduction**

Noise is unwanted signal in a video capture which degrades the video quality. To reduce the effects of noise in the video capture, the following methods will be useful:-

1. Using low pass filtering method: Noise may creates sharp variations in image. Some part of image gets change due to noise. So low pass filtering can beuseful.
2. Using averaging method: In this method of noise reduction 3 or 4 consecutive frames of videos are taken and added pixelby pixel and then averaged. This will reduce the random noise.

• **Color space conversion**

Camera modules provide the video in any color format. System converts the video from one color format to another. In image pipeline YUV color space is typically used. Taking human perception into account it encodes the color format. RGB color space is also simple to understand and it has all possible colors. It is made up of three colorants red color, green color and blue color.

System Architecture

The application scenario would include an enclosed building where people enter one at a time. The building is equipped with many interconnected camera modules. Each of the entrances is to be provided with a camera system such that each entrant is registered by taking his high resolution photograph. These images of people are stored in a central storage. Whenever a query for a person is requested in terms of photograph, the supplied image is compared with the ones in the database. After verifying the person’s presence, the feature related data of the subject is communicated to all the camera modules for tracking. The status of the tracked person is conveyed to the security official via a display terminal as shown in Figure 1

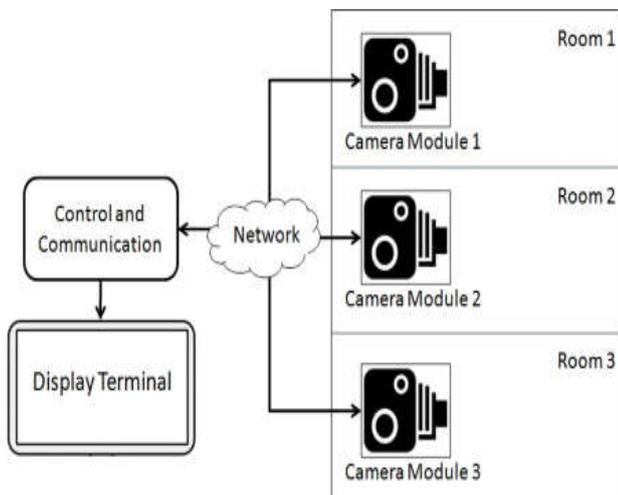


Figure 2. Block Diagram

• **Camera modules**

The camera modules are located at various locations in an enclosed place or a building. As a high resolution image would require larger computations while a low resolution image would degrade the video quality. Hence, an optimum resolution of 640x480 is a good trade off. The camera must present the data in an easily readable RGB for further processing on the host machine.

Proposed tracking algorithm

The objective of this system is to track the moving person across multiple cameras. Algorithms for example particle filter and mean shift are used for tracking. Particle filter is difficult to implement in real time. Mean shift algorithm is less complex and required few computations to implement in real time. As the system needs to be real time mean shift algorithm is suitable. The limitation of mean shift algorithm is that it can not detect change in size and orientation of objects. This can be solved by using adaptive mean shift algorithm. If the object is occluded then mean-shift algorithm failed. This can also be addressed by adding background subtraction into mean-shift algorithm. For using mean-shift algorithm for tracking the color information is required. This color information is known as histogram.

Histogram

An image histogram is a graphical representation of the color distribution in image. It plots the number of pixels for each color intensity. By looking at the histogram for specific image a viewer will be able to judge the entire distribution at a glance.

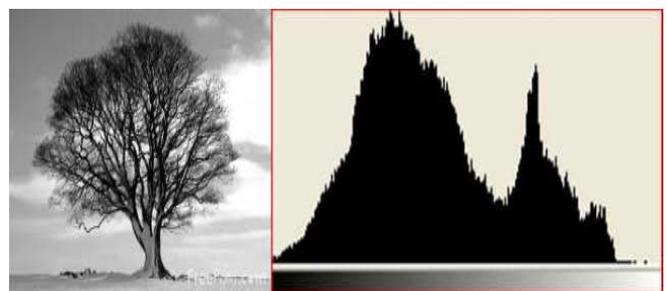


Figure 3. Image and it’s histogram

Mean-shift algorithm

Mean shift algorithm is used for pointing the maxima of a density function. Hence the mean shift vector always point toward the direction where there is maximum density or where the gradient of density function is zero.

Adaptive mean shift algorithm

The performance of mean shift tracking is reduces in real time tracking as it uses fix window size. As the name indicates adaptive mean-shift algorithm uses adaptive window sizes. The window size changes depending on the features matching. This algorithm uses mean shift algorithm.

Conclusion

In this paper, we have presented new intelligent system for real time person tracking and described how the system can be used to track down person in a locality. The system is designed to receive the data from camera modules. We have integrated mean-shift algorithm to achieve adaptive window size.

REFERENCES

- Bradski, G. 1998. "Real time face and object tracking as a component of a perceptual user interface," in Applications of Computer Vision. WACV '98. Proceedings., Fourth IEEE Workshop on, 1998, pp. 214–219.
- Chen, X., Li, X., Wu, H., and Qiu, T. 2012. "Real-time object tracking via CAMshift-based robust framework," in Information Science and Technology (ICIST), 2012 International Conference on, pp. 527–530.
- Cho, J. U., Jin, S.H., Pham, X. D. and J. W. Jeon, 2006. "Object tracking circuit using particle filter with multiple features," in SICE-ICASE, 2006. International Joint Conference, 2006, pp. 1431–1436.
- Cho, J. U., Jin, S.H., Pham, X. D., Jeon, J. W., Byun, J.E. and Kang, H. 2006. "A real-time object tracking system using a particle filter," in Intelligent Robots and Systems, 2006 IEEE/RSJ International Conference on, pp. 2822–2827.
- Denman, S., Fookes, C., and Sridharan, S. 2009. Improved simultaneous computation of motion detection and optical flow for object tracking. In Digital Image Computing: Techniques and Applications, DICTA '09., pages 175–182, 2009.
- Gang, X., Yong, C., Jiu-jun, C., and Fei, G. 2010. "Automatic CAMshift tracking algorithm based on fuzzy inference background difference combining with twice searching," in EHealth Networking, Digital Ecosystems and Technologies (EDT), 2010 International Conference on, vol. 1, 2010, pp. 1–4
- Jung, U.K. Cho, Seung-Hun Jin, Xuan Dai Pham, and Jae Wook Jeon. 2006. Object tracking circuit using particle filter with multiple features. In SICE-ICASE, 2006. International Joint Conference, pages 1431–1436.
- Li, B., Yuan Zeng, Z. and Ru Wu, Z. 2009. "Multi-object tracking based on improved mean-shift algorithm," in Image and Signal Processing. CISP '09. 2nd International Congress on, 2009, pp. 1–5.
- Qin-lan, X. 2009. "A real-time motion target detecting and tracking system based on tms320dm642," in Intelligent Systems. GCIS'09. WRI Global Congress on, vol. 3, 2009, pp. 83–87.
- Raty, T.D., 2010. Survey on contemporary remote surveillance systems for public safety. Systems, Man, and Cybernetics, Part C: Applications and Reviews, IEEE Transactions on, 40(5):493–515, 2010."
- Sahani, S., Adhikari, G. and Das, B. 2011. "A fast template matching algorithm for aerial object tracking," in Image Information Processing (ICIIP), 2011 International Conference on, pp. 1–6.
- Wang, Y., Casares, M. and Velipasalar, S. 2009. "Cooperative object tracking and event detection with wireless smart cameras," in Advanced Video and Signal Based Surveillance, 2009. AVSS '09. Sixth IEEE International Conference on, 2009, pp. 394–399.
